



Laivų įranga ir LED apšvietimas

Navigaciniai žibintai · Povandeninis apšvietimas · Salono ir denio šviestuvai
Skaitymo lempos · Prožektoriai · Saulės energijos ventiliatoriai

KATALOGAS 2026



www.aliuminesvaltys.lt

Valtys: +370 620 66666 · Gamyba: +370 615 15337

kimple.baltic@gmail.com

Sniegenų g. 26, LT-46383 Kaunas

APIE MUS

ALIUMINĖS VALTYS – aliuminių valčių ir laivų įrangos tiekėjas Lietuvoje.

Šiame kataloge rasite valtimis, kateriams ir jachtoms skirtą 12 V ir 24 V apšvietimo bei įrangos asortimentą: navigacinius žibintus, inkaro ir aplinkinio matomumo šviestuvus, povandeninį apšvietimą, salono, denio ir skaitymo šviestuvus, prožektorius bei saulės energijos ventiliatorius.

Gaminiai pagaminti iš jūrinei aplinkai pritaiktų medžiagų – nerūdijančio plieno AISI 304 ir AISI 316, žalvario, aliuminio ir UV atsparaus plastiko. Apsaugos klasė nuo IP65 iki IP68.

Nerandate reikiamo modelio ar reikia didesnio kiekio? Susisiekite – pakonsultuosime, parinksime tinkamą sprendimą ir pateiksime pasiūlymą.

KONTAKTAI

Valtys: +370 620 66666

Gamyba: +370 615 15337

kimple.baltic@gmail.com

Sniegenų g. 26, LT-46383 Kaunas

I–V 9:00–18:00 · VI 10:00–14:00

LED Navigation Light 12VDC



AV011021-WHLD



AV011022-WHLD



AV011023-WHLD




AV011024-WHLD



AV011025-WHLD

Wattage: 0.9W.
Voltage: DC 12V.
Material: Plastic.
Vertical mount.
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Housing color	Visibility
AV011021-WHLD	Green Starboard light	112.5°	White	1NM
AV011021-LD	Green Starboard light	112.5°	Black	1NM
AV011022-WHLD	Red Port light	112.5°	White	1NM
AV011022-LD	Red Port light	112.5°	Black	1NM
AV011023-WHLD	White Masthead light	225°	White	2NM
AV011023-LD	White Masthead light	225°	Black	2NM
AV011024-WHLD	White Stern light	135°	White	2NM
AV011024-LD	White Stern light	135°	Black	2NM
AV011025-WHLD	Bi-Color bow light	225°	White	1NM
AV011025-LD	Bi-Color bow light	225°	Black	1NM



LED Navigation Light 12VDC



AV011011-LD



AV011012-LD



AV011013-LD




AV011014-LD



AV011015-LD

Wattage: 1W
Voltage: DC 12V.
Material: Plastic and S.S.304.
LED with colored lens and black housing.
*DC24V LED lights available.
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Visibility
AV011011-LD	Green Starboard light	112.5°	1NM
AV011012-LD	Red Port light	112.5°	1NM
AV011013-LD	White Masthead light	225°	2MN
AV011014-LD	White Stern light	135°	2NM
AV011015-LD	Bi-Color bow light	225°	1NM

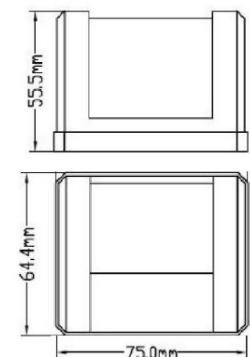

LED Navigation Light 10–30VDC



AV011200



AV011203




AV011204



AV011205

IP 66.
Bi-color light 3.4W.
Wattage: Sidelight 1.7W.
Voltage: DC 10-30V.
Material: Stainless Steel
Horizontal mount. Red and Green LED in clear lenses.
For use on boats up to 65.6 ft (20m).

Model No.	Type	Angle	Visibility
AV011200	Green Starboard light Red Port light	112.5° 112.5°	2NM 2NM
AV011203	White Masthead light	225°	2NM
AV011203	White Stern light	135°	2NM
AV011205	Bi-Color Bow light	225°	2NM



LED Navigation Light 12VDC



AV011006




AV011007



IP 66
Bi-color light 3W
Wattage: Sidelight 1.5W.
Voltage: DC 12V
Material: Stainless Steel
Horizontal mount. Red and green led in clear lenses
For use on boats up to 39.4 ft (12m).

Model No.	Type	Angle	Visibility
AV011006	Green Starboard light Red Port light	112.5° 112.5°	1NM 1NM
AV011007	Bi-Color Bow light	225°	1NM



LED Navigation Light 12VDC

For use on boats up to 39.4 ft (12m)


Bi-color light 2.2W.

Wattage: Sidelight 1.5W.

Voltage: DC 12V.

Material: S.S. 316 and PC base.

Horizontal mount.



Model No.	Type	Angle	Visibility
AV011090	Green Starboard light	112.5°	1NM
	Red Port light	112.5°	1NM
AV011094	White Stern Light	135°	2NM
AV011095	Bi-Color Bow light	225°	1NM



AV011090



AV011094

AV011095

LED Navigation Light

IP 66


For use on boats up to 39.4 ft (12m).

Wattage: 1W

Voltage: DC 10-30V

Material: Stainless Steel 304

Horizontal Surface mount.



Model No.	Type	Angle	Visibility
AV011070	Green Starboard light	112.5°	1NM
	Red Port light	112.5°	1NM
AV011075	Bi-Color Bow light	225°	1NM



AV011070

LED Navigation Light


IP 66

Voltage: 12VDC.

Visibility 2NM

Horizontal mount.

For use on boats up to 65.6 ft (20m).



Model No.	Type	Angle	Material
AV011026	Green Starboard light, Red Port light	112.5°	Plastic
AV011026-SS	Green Starboard light, Red Port light	112.5°	SS316
AV011027	Bi-Color Bow light	225°	Plastic
AV011027-SS	Bi-Color Bow light	225°	SS316



AV011026-SS

AV011026




AV011027-SS

LED Navigation Light 12VDC

S.S.316

IP 66
Angle: 112.5°
Wattage: 1W
Voltage: DC 12V.
Material: Stainless Steel 316
For use on boats up to 39.4 ft (12m).




Model No.	Type	Visibility
AV011028-SS	Green Starboard light Red Port light	1NM 1NM



AV011028-SS

LED Navigation Light 12VDC

IP 66.
Angle: 112.5°
Wattage: 0.8W
Material: Plastic
For use on boats up to 39.4 ft (12m).

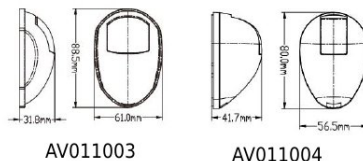

Model No.	Type	Visibility
AV011003	Green Starboard light Red Port light	1NM 1NM
AV011004	Green Starboard light Red Port light	1NM 1NM



AV011003




AV011004

LED Navigation Light 10-30VDC

USCG 2NM

IP 66.
Angle: 112.5°
Wattage: 2W
Material: Plastic.
Vertical mount.
For use on boats up to 65.6 ft (20m).



Model No.	Type	Housing	Visibility
AV011005-WHC	Green Starboard light Red Port light	White	2NM
AV011005-BKC	Green Starboard light Red Port light	Black	2NM
AV011005-CP	Green Starboard light Red Port light	Plastic Plating Silver	2NM



AV011005-CP



AV011005-WHC



AV011005-BKC

LED Stern Light 12VDC

IP 66.


Angle:135°

For use on boats up to 65.6 ft (20m).

Wattage: 2.2W.

Voltage: 12VDC.

Material: S.S.304.



AV11053



Model No.	Type	Lighting color	Visibility
AV11053	Round Stern Light	Cool White	2NM
AV11053W	Round Stern Light	Warm White	2NM
AV11055	Round Stern Light	Bule	—

Navigation Light 12VDC


IP 65.

Angle:112.5°

Voltage: 12VDC.

Material: Plastic

For use on boats up to 39.4 ft (12m).

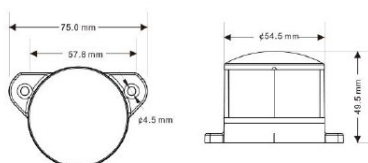

AV011077-LD


Model No.	Type	Wattage	Visibility
AV011077(Tungsten lamp)	Green Starboard light	5W	1NM
	Red Port light		1NM
AV011077-LD(LED)	Green Starboard light	1.5W	1NM
	Red Port light		1NM

LED Bi-color Bow Light

IP65

Angle:225°

For use on boats up to 39.4 ft (12m).





AV011072

AV011073

Model No.	Material	Voltage	watt	Visibility
AV011072	Chrome-plated zinc	12VDC	0.7W	1NM
AV011073	Stainless Steel	10-30VDC	2W	2NM

LED Bi-color Bow Light 12VDC

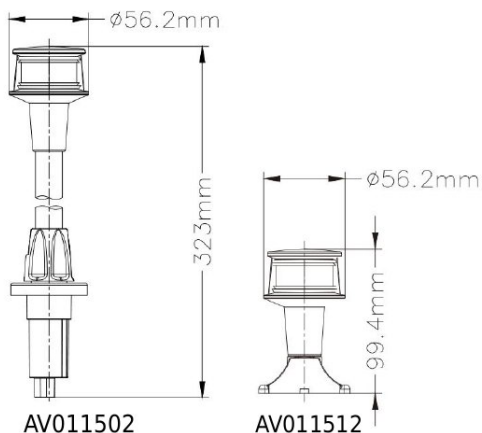

IP65

Visibility:1NM

For use on boats up to 39.4 ft (12m)

Wattage: 1.5 W.

Voltage:12 VDC.

Model No.	Base Type	Height
AV011502	Plug-in mount	12" (306mm)
AV011502-B2	Plug-in mount, w/ Straight base	12" (306mm)
AV011512	Fixed mount	4" (99mm)
AV011512-WH	Fixed mount	4" (99mm)



AV011502



AV011502-B2



AV011512



AV011512-WH

LED Bi-color Bow Light 12VDC

IP66


Visibility:1NM

For use on boats up to 39.4 ft (12m).

Wattage: 2 W.

Voltage:12 VDC.

Material: Plastic+Stainless Steel



Model No.	Base Type		Height
AV011527-12	Plug-in mount	without work light	11-1/8" (282mm)
AV011527-12B3	Plug-in mount, w/ SS Straight base	without work light	11-1/8" (282mm)
AV011528-12	Plug-in mount	with work light	11-1/8" (282mm)
AV011528-12B3	Plug-in mount w/ SS Straight base	with work light	11-1/8" (282mm)




AV011527



AV011528

LED Tri-color Bow Light 12VDC

Visibility:1NM
 Voltage : 12VDC
 Wattage : 1.5W*2
 LED Tri-Color Light use
 for boats up to 39.4 ft (12m).



Model No.	Visibility	Angle
AV011185D-3C	1NM	Red+Green+White=360degree




AV011185D-3C

All-round And Masthead Light

Visibility:2NM
 All-Round light use for boats up to 39.4 ft (12m).
 Stainless steel tube.
 Angle 225° /360° .

Model No.	Bulb Type	Height
AV011185	Tungsten lamp	4" (99mm)
AV011185D	LED	4" (99mm)
AV011185L	Tungsten lamp	12" (293mm)
AV011185LD	LED	12" (293mm)
AV011186	Tungsten lamp	10" (259mm)
AV011186D	LED	10" (259mm)

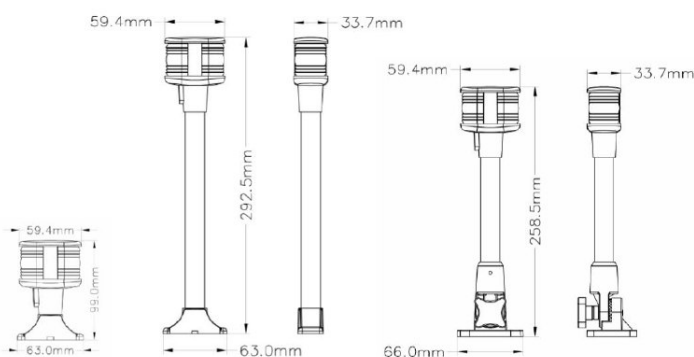

AV011185

AV011185L

AV011186



AV011185



AV011185L



AV011186

LED All Round Light 10–30VDC

USCG 2NM


IP67

For use on boats up to 164 ft (50m).

Wattage: 3 W.

Voltage: 10–30 VDC.

Material: Plastic

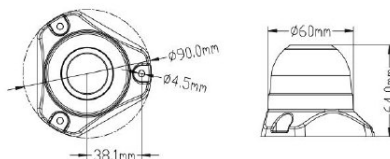

Model No.	Lighting Color	Certificate
AV011001	White 360 °	USCG 3NM
AV011001-GN	Green 360 °	USCG 2NM
AV011001-RD	Red 360°	USCG 2NM



AV011001



AV011001-RD



AV011001-GN

LED All Round Light 8–30VDC

IP67.


Visibility: 3NM

LED All-Round Light use for boats up to 65.6 ft (20m).

Wattage: 3W.

Voltage: 8–30 VDC.

Material: Plastic+Aluminum pole.



AV011201-8A

AV011201-12A

Model No.	Base Type	Overall Length
AV11201-8A	Adjustable base	8" (203mm)
AV11201-12A	Adjustable base	12" (305mm)



AV11201-12A




AV11201-8A

LED All-round Light 12VDC

Model No.	Base Type	Overall Length	
AV011184-4	Fixed mount	2.8" (70mm)	IP65 Visibility: 2NM Wattage: 1.5 W. Voltage: 12 VDC. Material: Plastic+Stainless Steel Color Temperature: Daylight white 4000-4500K LED All-Round Light use for boats up to 65.6 ft (20m).
AV011184-7	Fixed mount	6" (150mm)	
AV011284-9	Adjustable mount	8" (205mm)	
AV011284-25	Adjustable mount	23.6" (600mm)	
AV011384	Adjustable mount	14.2" (360mm)	
AV011584-24	Plug-in mount	22" (557mm)	

SERIES 84

USCG 2NM

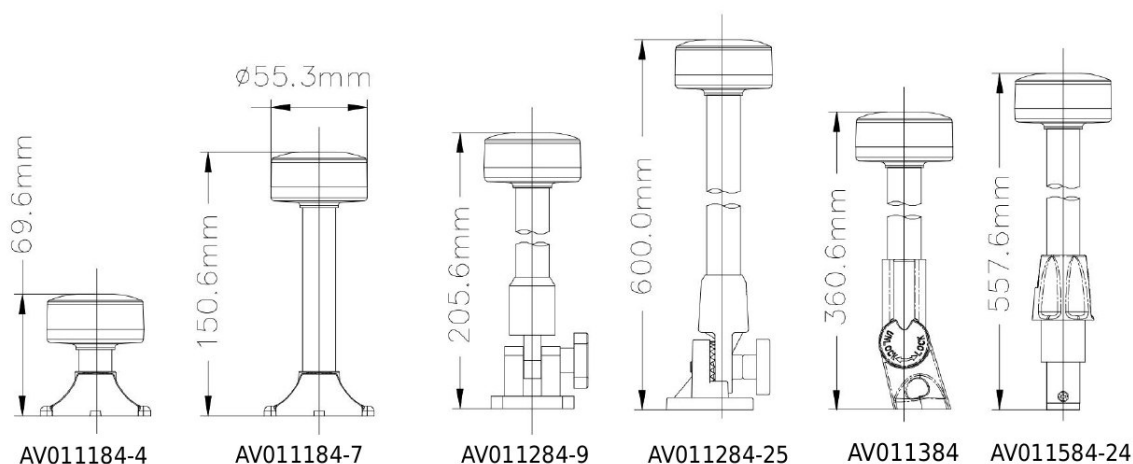

LED All-round Light 12VDC


Model No.	Base Type	Overall Length	
AV011189-4	Fixed mount	4" (106mm)	IP65 Visibility: 2NM Wattage: 1.5 W. Voltage: 12 VDC. Material: Plastic + Stainless Steel Color Temperature: Daylight white 4000-4500K LED All-Round Light use for boats up to 65.6 ft (20m).
AV011189-7	Fixed mount	7-1/2" (186mm)	
AV0111289-9N	Adjustable mount	9-1/4" (235mm)	
AV011289-25N	Adjustable mount	25" (635mm)	
AV011289-22A	Adjustable mount	21-1/2" (546mm)	
AV011289-25A	Adjustable mount	25" (635mm)	
AV011389-12A	Adjustable mount	12" (305mm)	
AV011389-16	Adjustable mount	16" (396mm)	
AV011389-16A	Adjustable mount	16" (396mm)	
AV011589-24	Plug-in mount	24" (593mm)	
AV011589-24B	Plug-in mount, w/Straight base	24" (593mm)	
AV011589-36	Plug-in mount	36" (898mm)	
AV011689	Plug-in mount	28-1/4" ~ 44" (750-1110mm)	

SERIES 89

USCG 2NM



AV011189-4 AV011189-7 AV011289-9N AV011289-25N AV011389-16 AV011589-24 AV011589-24B AV011689

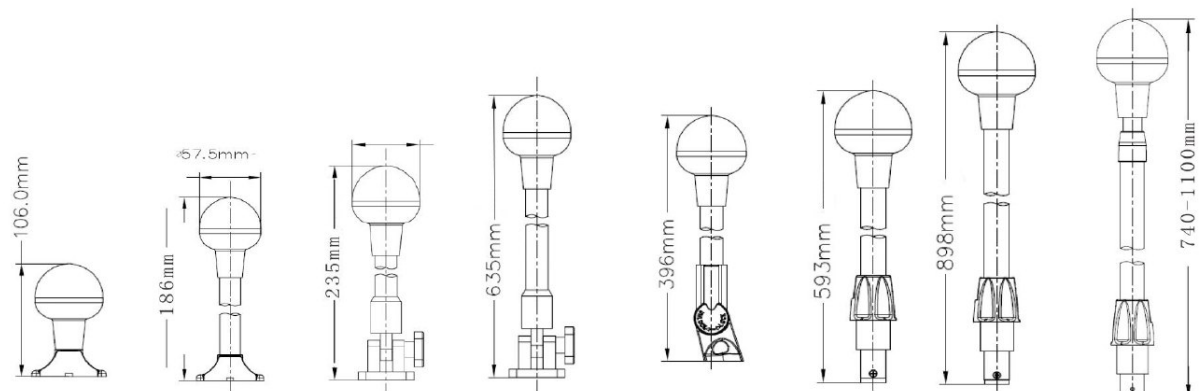


AV011189-4 AV011189-7 AV011289-9N AV011289-25N AV011389-16 AV011589-24 AV011589-36 AV011689

LED All-round Light 12-24VDC

Model No.	Base Type	Overall Length	
AV011042	/	1-3/4" (71mm)	IP65 Visibility:3NM For use on boats up to 65.6 ft (20m). Wattage: 2.5 W. Material: Plastic+Stainless Steel Color Temperature: Daylight white 4000-4500K *12-24VDC Green or Red LED light available
AV011142	Fixed mount	4-7/8" (124mm)	
AV011142-WH	Fixed mount	4-7/8" (124mm)	
AV011142-12	Fixed mount	12-1/2" (318mm)	
AV011242-9	Adjustable mount	9-1/2" (248mm)	
AV011242-25	Adjustable mount	25" (642mm)	
AV011342-16	Adjustable mount	16" (403mm)	
AV011542-24	Plug-in mount	24" (600mm)	
AV011542-24B	Plug-in mount, w/ Straight base	24" (600mm)	
AV011542-36	Plug-in mount	36" (905mm)	

SERIES 42

USCG 3NM

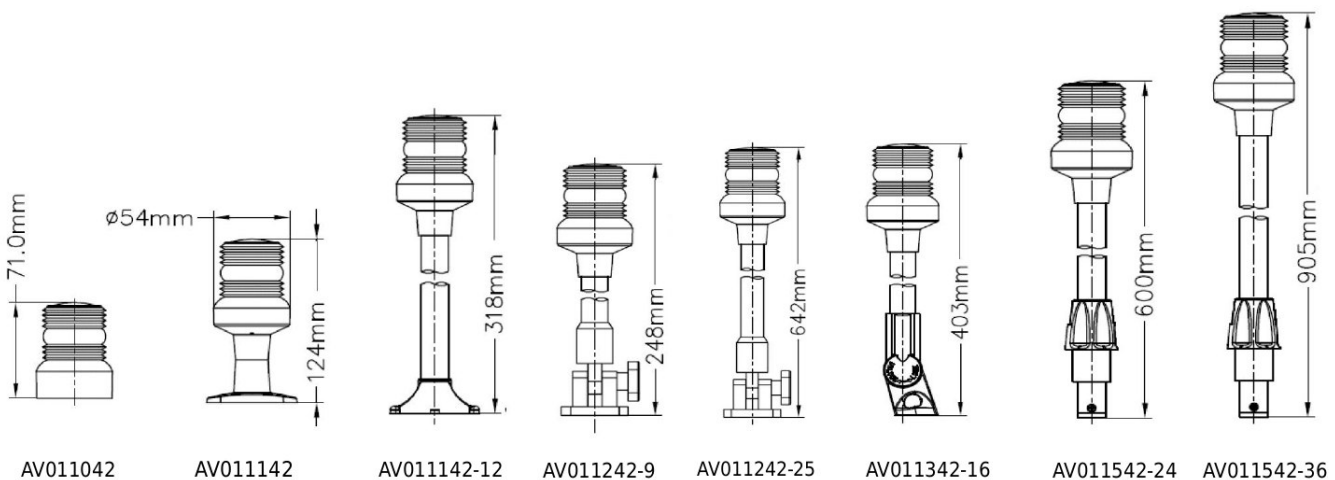

LED All-round Light 12-24VDC SERIES 62

Model No.	Base Type	Overall Length	
AV011162-D	Fixed mount	4-3/8" (110mm)	IP65 Visibility: 2NM Wattage: 2.5 W. Material: Plastic+Stainless Steel. For use on boats up to 65.6 ft (20m).
AV011162-DWH	Fixed mount	4-3/8" (110mm)	
AV011262-D	Adjustable mount	9-5/8" (244mm)	
AV011562-D12B	Plug-in mount W/straight base	13" (335mm)	

Straight Light Head



SH011162-DWH AV011162-D, AV011262-D AV011562-D12B AV011162-DWH AV011262-D AV011562-D12B

Angled Light Head

Model No.	Base Type	Overall Length
AV011262	Adjustable mount	9-1/2" (248mm)
AV011362	Adjustable mount	16" (403mm)
AV011562-24WH	Plug-in mount	24" (600mm)
AV011562	Plug-in mount	24" (600mm)
AV011562B	Plug-in mount, w/Angled base	24" (600mm)
AV011662(Telescopic Aluminum Pole)	Plug-in mount	29-1/4"~43-3/4" (750-1110mm)




AV011262 AV011362 AV011562-24WH AV011562 AV011662 AV011262, AV011362, AV011562-24WH AV011562 AV011662

LED Anchor Light 12-24VDC

Model No.	Base Type	Overall Length	
AV011180	Fixed mount	8" (198mm)	IP65 Visibility:2NM Wattage: 2.5 W Voltage:12-24 VDC
AV011280	Adjustable mount	10" (252mm)	
AV011380	Adjustable mount	16" (407mm)	
AV011580	Plug-in mount	24" (604mm)	
AV011580-24B	Plug-in mount,w/Angled base	24" (604mm)	
AV011680 (Telescopic Aluminum Pole)	Plug-in mount	28-1/4" ~44-3/4" (750-1110mm)	

SERIES 80

USCG 2NM

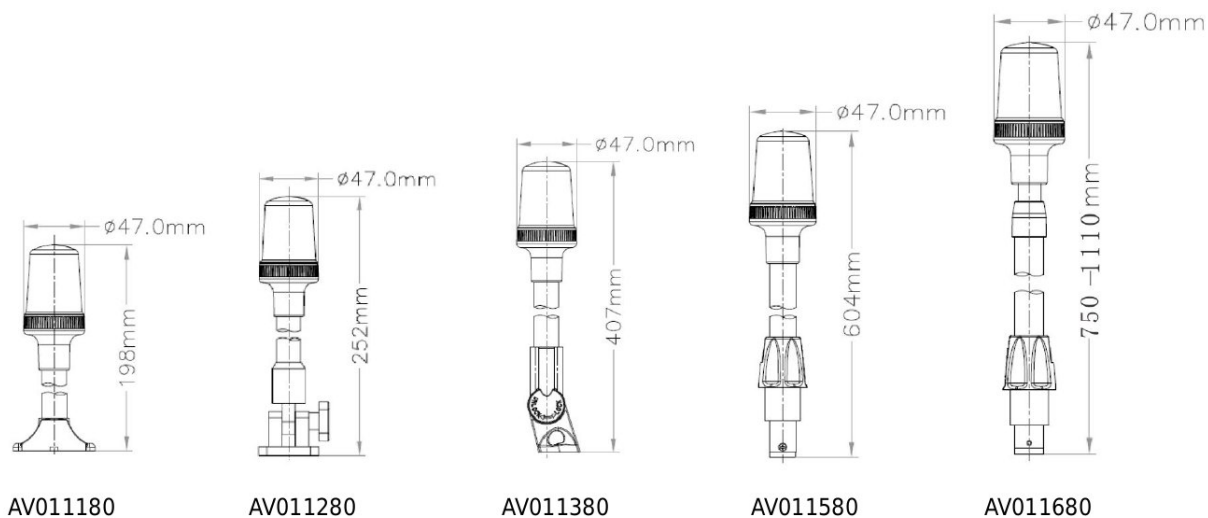

LED All-round Light 10-30VDC

Model No.	Base Type	Overall Length	
AV011160-5	Fixed mount	6" (152mm)	IP65. Visibility: 2NM Wattage: 1 W. Voltage: 10-30 VDC. Material: Plastic+Stainless Steel pole Angle 360°.
AV011260-9	Adjustable mount	9.5" (247mm)	
AV011260-12A	Adjustable mount	12" (305mm)	
AV011260-25A	Adjustable mount	23.6" (600mm)	
AV011360-15A	Adjustable mount	15" (381mm)	
AV011560-24A	Plug-in mount	22" (557mm)	
AV011660	Plug-in mount	27-1/3" 41-1/3" (695-1050mm)	



AV011160-5



AV011260-9



AV011260-12A




AV011360-15A




AV011560-24A




AV011660




AV011160-5SH011260-9




AV011260-12A




AV011260-25A



AV011360-15A



AV011560-24A



AV011660

Mounting Base, for Plug-in Mount Pole Lights



AV011500-SS



AV011500-S



AV011500-T



AV011700-A2

Model No.	Base Type	Material
AV011500-SS	Straight base	Stainless Steel and PC
AV011500-S	Straight base	Plastic
AV011500-T	Angled base	Plastic
AV011700-A2	Angled base	Plastic

Portable LED Navigation Lights

Battery Operated, No Wires Required



AV011206-RG



AV011206-WH



AV011206-RGN



AV011206-WHN



AV011206-WHM



AV011206-RGM

Model No.	Color	Angle	Type	Visibility	
AV011206-RG	Bi-Color bow light	225°	Fixed base	1NM	Waterproof: IP66 For use on Kayak, Inflatable boat, Canoe... *Battery (not included)
AV011206-WH	White	360°	Fixed base	2NM	
AV011206-RGN	Bi-Color bow light	225°	Swivel base	1NM	
AV011206-WHN	White	360°	Swivel base	2NM	
AV011206-RGM	Bi-Color bow light	225°	Magnetic base	1NM	
AV011206-WHM	White	360°	Magnetic base	2NM	
AV011206-BS	Lock Base Only				

LED Replace Bulb

LED: 33pcs×0.2W 2835
 Effective Wattage: 2 W.
 Voltage: 10-24VDC
 Material: PC+Ceramic
 Type: BA15D parallel double contacts
 Lighting Angle : 360 degree


Model No.	Color Temperature	Type
AV001174-NWH	Nature White	BA15D parallel double contacts
AV001174-NWH/1	Nature White	BA15D high and low double contacts
AV001174-RD	Red	/
AV001174-GN	Green	/



LED Replace Bulb

Voltage: 12VDC
 Material: Stainless steel
 Type: Festoon LED
 Lighting Angle : 360 degree
 Color: Nature white.
 Size: Overall length

Model No.	LED	Effective Lumen	Watts	Color Temperature
AV001140-WH36	16 PCS*0.2W	130LM	1.8w	Nature White 4000-4500K
AV001140-WH44	24 PCS*0.2W	193LM	2.6w	Nature White 4000-4500K



AV001140-WH44



AV001140-WH36

LED Underwater Fishing Light 10-30VDC

IP68

Effective wattage:24W/45W

Material: PC & Aluminum.

These super bright LED lights that is your best choice to attract prawns, squids and fish.

These underwater LED lights can penetrate up to 5m

Model No.	Color & Color Temperature	LED Power
AV018006-WH	White (5500-6300 K)	60×0.5 W
AV018006-GN	Green	60×0.5 W
AV018006-BU	Blue	60×0.5 W
AV018007-WH	White (5500-6300 K)	123×0.5 W
AV018007-GN	Green	123×0.5 W
AV018007-BU	Blue	123×0.5 W



LED Underwater Fishing Light 10-30VDC

IP68

Effective wattage:45W

Applied wide range voltage 10-30V.

Brighter than a 400 watt halogen light with only 45w power consumption.

Saving 70% electricity than the conventional light.

Hexagon hollow aluminum tube is used to lower the temperature rapidly and will prolong the life of the LED.

Double-layer waterproof design for better performance.

Material: PC & Aluminum

Model No.	Color & Color Temperature	LED Power
AV018008-WH	White (5500-6300 K)	144×0.5 W
AV018008-GN	Green	144×0.5 W
AV018008-BU	Blue	144×0.5 W



LED Underwater Light 10–30VDC



AV019018



AV019019



IP68

Working Voltage: 10-30 VDC


Cover Material: S.S.316 polished

Mount Type: Surface mount


Diameter: 3"-2/3"(92.8mm)

High quality S.S.316 under water light are designed to be internal driver, easy to installed on the boat surface.

Model No.	Color	LED Power
AV019018	White	6×3W
AV019019	Blue	6×3W



LED Muti-color Underwater Light 12–24VDC



AV019021B-C

IP68

Working Voltage: 12-24 VDC

Cover Material: S.S.316 polished


RF remote control (433 MHz)/ switch control

RGBW+7 Muti-colors 4 modes

* The master controller can connect up to 3 lights.


* The vice controller use for more than 3 lights in a boat.

Model No.	Color	LED Power
AV019021B	Muti-Color	6pcs x 3W RGBW LED
AV019021B-C	Master Controller with Remote controller, 3 wire connectors	
AV019021-C1	Vice Controller	



LED Underwater Light

S.S.316



AV019002-1




AV019005


Water Proof Level: IP68
Working Voltage: 10-30 VDC
Cover Material: S.S.316 polished
Material: Stainless Steel 316
Mount Type: Surface mount
Viewing Angle : 90°

High quality S.S.316 under water light are designed to be internal driver, easy to installed on the boat surface.

Model No.	Color	LED Power	Overall Length
AV019001-1	Cool White	27X0.2W	3-5/6"(95.5mm)
AV019001-W2	Warm White	27X0.2W	3-5/6"(95.5mm)
AV019002-1	Blue	27X0.2W	3-5/6"(95.5mm)
AV019002-RD	Red	27X0.2W	3-5/6"(95.5mm)
AV019003	Green	27X0.2W	3-5/6"(95.5mm)
AV019002-WB	White+Blue	24X0.2W*2	3-5/6"(95.5mm)
AV019004	Cool White	39X0.2W	4-3/4"(120mm)
AV019005	Blue	39X0.2W	4-3/4"(120mm)
AV019005-WB	White+Blue	33X0.2W*2	4-3/4"(120mm)



AV019005





AV0190052-1

LED Underwater Light



Working Voltage: 12 VDC
Water Proof Level: IP68
Mount Type: Surface mount

Model No.	Color	LED Power
AV018005-WH	Warm White	6x0.2W
AV018005-BU	Blue	6x0.2W



LED Trim Tab Trasom Underwater Light Bar 12-24VDC




Water Proof Level: IP68

Mount Type: Surface mount

High quality under water light are designed to be internal driver, easy to installed on the boat surface.

Model No.	Color	LED Power
AV019007	One pair white	21×0.2W
AV019008	One pair blue	21×0.2W

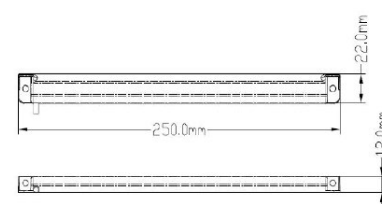

LED Plug Drain Underwater Light



AV019011


AV019014




Water Proof Level: IP68

Material: Brass

Model No.	Color	LED Power	Voltage
AV019011	White	2×0.2W	12VDC
AV019012	Blue	2×0.2W	12VDC
AV019014	White	1×7W	10-30VDC
AV019015	Blue	1×7W	10-30VDC



AV019014



AV019011

LED Underwater Light 10–30VDC



AV019031



AV019131S




High quality underwater light are designed to be internal driver, easy to installed on the boat surface.

Extremely bright.



Working Voltage: 10-30 VDC.

Water Proof Level: IP68.

Model No.	Color	LED Power	Cover Material
AV019031	White	3×3W	PC
AV019032	Blue	3×3W	PC
AV019131	White	6×3W	PC
AV019131S	White	6×3W	S.S.316
AV019132	Blue	6×3W	PC
AV019132S	Blue	6×3W	S.S.316



AV019031



AV019131S



LED Underwater Light 10–30VDC



AV019121



AV019121S



AV019221



AV019221S



AV019321



AV019321S


Extremely bright.

Working Voltage: 10-30 VDC.


Water Proof Level: IP68.

High quality under water light are designed to be internal driver, easy to installed on the boat surface.



Model No.	Color	LED Power	Cover Material
AV019021R	White	3×3W	PC
AV019022	Blue	3×3W	PC
AV019121	White	6×3W	PC
AV019121S	White	6×3W	S.S.316
AV019122	Blue	6×3W	PC
AV019122S	Blue	6×3W	S.S.316
AV019221	White	9×3W	PC
AV019221S	White	9×3W	S.S.316
AV019222	Blue	9×3W	PC
AV019222S	Blue	9×3W	S.S.316
AV019321	White	12×3W	PC
AV019321S	White	12×3W	S.S.316
AV019322	Blue	12×3W	PC
AV019322S	Blue	12×3W	S.S.316




AV019121



AV019221



AV019321



LED Oblong Courtesy Light


IP67

Wattage: 0.5W

LED power: 3x0.2W

Flush mount

Material: S.S. 316 and PC base.



Model No.	Color	Voltage
AV013106-CWH	Cool White(5500-6300K)	12VDC
AV013106-WH	Warm White(2900-3200K)	12VDC
AV013106-BU	Blue	12VDC
AV013106-CWH24	Cool White(5500-6300K)	24VDC
AV013106-WH24	Warm White(2900-3200K)	24VDC
AV013106-BU24	Blue	24VDC
AV013106-CWHK	Cool white(5500-6300K)	12-24VDC
AV013106-WHK	Warm white(2900-3200K)	12-24VDC
AV013106-BUK	Blue	12-24VDC



LED Oblong Courtesy Light


IP67

Wattage: 0.5W.

Voltage: 12VDC.

Flush mount.

Material: Plastic



Model No.	Material	Color Temperature	LED Power
AV013106-CWHW	PC White	Cool White(5500-6300K)	3x0.2W
AV013106-WHW	PC White	Warm White(2900-3200K)	3x0.2W
AV013106-BUW	PC White	Blue	3x0.2W
AV013106-CWHB	PC Black	Cool White(5500-6300K)	3x0.2W
AV013106-WHB	PC Black	Warm White(2900-3200K)	3x0.2W
AV013106-BUB	PC Black	Blue	3x0.2W



AV013106-CWHW



AV013106-WHB


LED Courtesy Light

IP67

Wattage: 1.2W

Mount Type: Surface mount

Material: S.S. 304



Model No.	Voltage	Color Temperature	LED Power
AV012081	12VDC	Cool White(5500-6300K)	6x0.2W
AV012082	12VDC	Blue	6x0.2W
AV012081-24	24VDC	Cool White(5500-6300K)	6x0.2W
AV012082-24	24VDC	Blue	6x0.2W



AV012081

AV012082


LED Courtesy Light

IP65

Working Voltage: 12 VDC

Mount Type: Surface mount

Material: PC



Model No.	Color Temperature	LED Power
AV013051	Warm White(2900-3200K)	5×0.5W
AV013052	Blue	5×0.5W



AV013051

AV013052

LED License/courtesy Light


IP67

Wattage: 0.6W.

Voltage: 12VDC.

Surface mount.

Material:PC.



Model No.	Color Temperature	Lens Type
AV013108-WH	Cool White(5500-6300K)	Clear
AV013108-WH	Cool White(5500-6300K)	White
AV013118-WH	Blue	White
AV013108-BK	Cool White(5500-6300K)	Clear
AV013108-BK	Cool White(5500-6300K)	White
AV013118-BK	Blue	White



AV013108-WH

AV013108-BK

LED Courtesy Light


IP67

Wattage: 0.4W.

Voltage: 12VDC.

Surface mount.

Material:PC+Stainless Steel.



Model No.	Color & Color Temperature	LED Power
AV013107-WH	Cool White(5500-6300K)	4×0.2W
AV013107-WWH	Warm White(2800-3200K)	4×0.2W




AV013107-WH

LED Courtesy Light

Wattage: 0.2 W.

Working Voltage: 12 VDC

Mount Type: Flush mount




Model No.	Color Temperature	LED Power
AV013101	Cool White(5500-6300K)	1×0.2W
AV013101-02	Warm White(2800-3200K)	1×0.2W
AV013101-BU	Blue	1×0.2W
AV013101-M	Multi-Color	4×0.2W



AV013101

AV013101-02



AV013101-BU

AV013101-M

LED Courtesy Light

IP66
Working Voltage: 12 VDC
Mount Type: Flush mount
Material: Stainless Steel
Lumen:28
Mount hole 2inch (51mm)
Diameter:3inch (76mm)


Model No.	Color Temperature	LED Power
AV013200	Cool White(5500-6300)	0.5W



AV013200

LED Livewell Light 12VDC

IP68
Wattage: 0.2W.
Voltage : 12VDC.
Flush mount.
Material: PC



AV013011

AV013021

Model No.	Color Temperature	LED Power
AV013011	Cool White(5500-6300K)	1×0.2W
AV013012	Blue	1×0.2W
AV013021	Cool White(5500-6300K)	1×0.2W
AV013023	Blue	1×0.2W




AV013011



AV013021

Wattage:9.8W
Working Voltage:DC10-30V
Surface mount.
Material: PC
Housing Colour : White



Model No.	Color Temperature	LED Power
AV012301	Cool White(5500-6300K)	33x0.5w



AV012301

LED Ceiling Light


IP66

Wattage: 1W.

Working Voltage: 12 VDC

Flush mount

LED Power: 6x0.2W

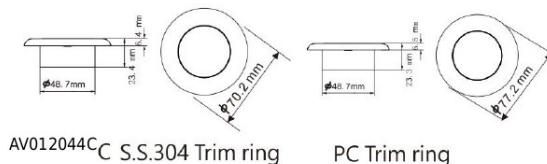

AV012045



AV012041C



AV012046

Model No.	Color Temperature	Material
AV012041C	Cool White(5500-6300K)	PC White
AV012041	Warm White(2900-3000K)	PC White
AV012042	Blue	PC White
AV012044C	Cool White(5500-6300K)	PC+S.S.304
AV012044	Warm White(2900-3000K)	PC+S.S.304
AV012045	Blue	PC+S.S.304
AV012046	Red	PC+S.S.304

LED Ceiling Light


IP67

Wattage: 1W.

Voltage: 12VDC.

Surface mount.

LED Power: 6x0.2W



AV012071



AV012072

Model No.	Color Temperature	Material
AV012071	Cool White(5500-6300K)	PC+S.S.304
AV012072	Blue	PC+S.S.304
AV012073	Warm white	PC+S.S.304

LED Ceiling Light


IP66

Wattage: 0.5W.

Working Voltage: 12 VDC

Flush mount

LED Power: 3x0.2W

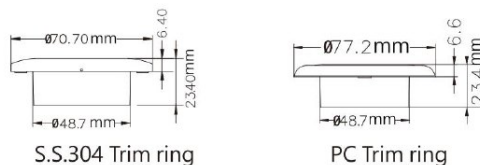

AV013031



AV013033


Model No.	Color Temperature	Material
AV013031	Cool White(5500-6300K)	PC
AV013033	Blue	PC
AV013034	Cool White(5500-6300K)	PC+S.S.304
AV013035	Blue	PC+S.S.304

LED Ceiling Light 12VDC

Wattage: 3.6 W.

Mount Type: Surface mount

LED "2835":20×0.2W



Model No.	Color Temperature	Diameter	Material	Voltage
AV012013	White (5500-6300K)	106.6mm(4-1/6")	Brass	12V
AV012014	White (5500-6300K)	106.6mm(4-1/6")	S.S.304	12V
AV012023	White (5500-6300K)	137mm/ (5-3/8")	Brass	12V
AV012024	White (5500-6300K)	137mm/ (5-3/8")	S.S.304	12V
AV012024-WR	Red/White (5500-6300K)	137mm/ (5-3/8")	S.S.304	12V
AV012033	White (5500-6300K)	168mm/(6-5/8")	Brass	12V
AV012034	White (5500-6300K)	168mm/(6-5/8")	S.S.304	12V
AV012034-24V	White (5500-6300K)	168mm/(6-5/8")	S.S.304	24V



Stainless Steel

Brass


LED Ceiling Light

Wattage: 4.4 W.

Working Voltage: 12 VDC

Mount Type: Surface mount

LED "2835":24 pcs

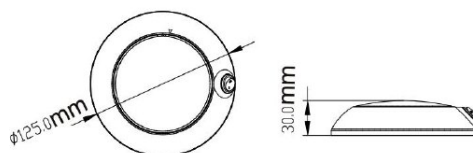

Model No.	Color Temperature	Diameter
AV012052	White (5500-6300K)	125mm/5 "




LED Ceiling Light

Wattage: 5inch 6W, 4inch 4W

Working Voltage: 10-30VDC

Mount Type: Surface mount

With blue night light switch

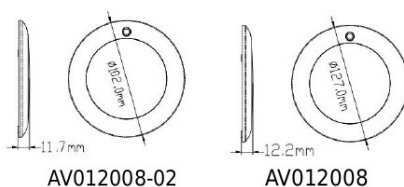


Model No.	Color Temperature	Diameter
AV012008	Warm White (2900-3200K)	127mm/5"
AV012008-C	Cool White (5800-6300K)	127mm/5"
AV012008-02	Warm White (2900-3200K)	102mm/4"
AV012008-02C	Cool White (5800-6300K)	102mm/4 "



LED Ceiling Light 12VDC


Wattage: 2.2W
Working Voltage: 12VDC
Mount Type: Surface mount



Model No.	Color Temperature	Material
AV012104	Warm White (2900-3200K)	PC

LED Ceiling Light

Wattage: 3W
Working Voltage: 8-30 VDC
Mount Type: Flush spring mount



Model No.	Color Temperature	Material
AV018001	RGBW (White 5500-6300K) Red, Green, Blue, White	Stainless Steel



LED Ceiling Light

Wattage: 3W
Working Voltage: 8-30 VDC
Mount Type: Flush spring mount



Model No.	Color Temperature	Material
AV012001	Warm White (2800-3000K)	Stainless Steel

LED Strip Light 12VDC


IP:67
Wattage: 3W
Working Voltage: 12 VDC
Mount Type: Surface mount
Housing Material: Aluminum

Model No.	Color Temperature	Lenght
AV014052	Warm White (2900-3200K)	11-7/8" /300mm



LED Strip Light

IP:67
Wattage: 1W
Working Voltage: 12 VDC
Mount Type: Flush mount
Housing Material: PC

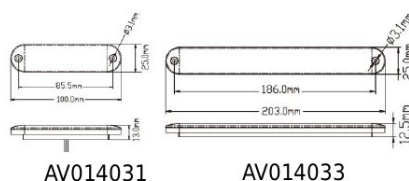


Model No.	Color Temperature	Lenght
AV014031	White (5500-6300K)	4" / 100mm
AV014032	Blue	4" / 100mm
AV014033	Blue	8" / 203mm
AV014034	White (5500-6300K)	8" / 203mm



LED Strip Light

IP:67
Wattage: 1W
Working Voltage: 12 VDC
Mount Type: Surface mount
Housing Material: PC

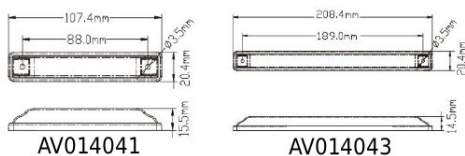


Model No.	Color Temperature	Lenght
AV014041	White (5500-6300K)	4-1/4" / 107.4mm
AV014042	Blue	4-1/4" / 107.4mm
AV014043	Blue	8-1/4" / 208.4mm
AV014044	White (5500-6300K)	8-1/4" / 208.4mm



LED Strip Light

IP:67
Wattage: 4W
Working Voltage: 12 VDC
Mount Type: Surface mount
Material : Plastic
Switch: ON/OFF



Model No.	Color Temperature	Lenght
AV014061-NWH	White (4000-4500K)	9-3/8" / 240mm
AV014061-WB	White+Blue	9-3/8" / 240mm
AV014061-WR	White+Red	9-3/8" / 240mm
AV014061-NWH1	White(4000-4500K)	9-3/8"/240 mm No Switch




LED Reading Light

Wattage: 3.1W

Working Voltage: 12 VDC

Mount Type: Surface mount




Model No.	Color Temperature	Material
AV015001	Warm White (2900-3200K)	Stainless Steel

LED Reading Light

Wattage: 3.1W

Working Voltage: 12 VDC

Mount Type: Surface mount




Model No.	Color Temperature	Material
AV015002	Warm White (2900-3200K)	Stainless Steel

LED Brass Reading Light

Wattage: 0.5W

Working Voltage: 12 VDC

Mount Type: Surface mount




Model No.	Color Temperature	Material
AV015011	Warm White (2900-3200K)	Brass Lacquered

LED Brass Reading Light

Wattage: 3.1W

Working Voltage: 8-30 VDC

Mount Type: Surface mount



Model No.	LED&Color	Material
AV015031	1x3W/Warm White	Stainless Steel
AV015032	1x3W/Warm White	Brass Lacquered
AV015033	12x0.2W/Warm White	Stainless Steel

LED Reading Light

Wattage: 1W

Working Voltage: 12VDC

Surface finished: Chrome

Mount Type: Surface mount

Material : Aluminum

Model No.	Color Temperature	Type
AV015351	Warm White (2900-3200K)	Swivel joint
AV015352	Warm White (2900-3200K)	Flex



AV015351



AV015352

LED Reading Light

Wattage: 2W

Working Voltage: 12VDC

Surface finished: Satin nickel

Mount Type: Surface mount

Material : Aluminum

Model No.	Color Temperature	Type
AV015311-01	Warm White (2900-3200K)	Swivel joint
AV015312-01	Warm White (2900-3200K)	Flex



AV015311-01



AV015312-01

LED Reading Light

Wattage: 2W

Working Voltage: 12VDC

Surface finished: Chrome

Mount Type: Surface mount

Material : Aluminum

* For RV use only

Model No.	Color Temperature	Type
AV015401	Warm White (2900-3200K)	Flex



AV015401

LED Reading Light

Wattage: 1W

Working Voltage: 12VDC

Surface finished: Chrome

Mount Type: Surface mount

Material : Aluminum

* For RV use only

Model No.	Color Temperature	Type
AV015391	Warm White (2900-3200K)	Swivel joint



AV015391

LED Spot Light 8-30VDC

High quality LEDs for maximum light output and energy efficiency.

Perfect beams of light to eliminate dark spot.

Extremely bright.

Effective Wattage: 27W


Working Voltage: 10-30 VDC

Modes: Flash, Fade, SOS, Dimmer

Rotation: 355° & E 70°

50M distance RF remote control

IP Rating: IP65



Model No.	Color Temperature	LED
AV016001-B	Cool White (5500-6300K)	12x5W
AV016001-B2	Warm White (2900-3200K)	12x5W

LED Spot Light 8-30VDC

IP Rating: IP65

Effective Wattage: 21W

Working Voltage: 10-30 VDC

Mount Type: Surface mount


Rotation: 355° & E 70°

50M distance RF remote control

High quality LEDs for maximum light output and energy efficiency.

Perfect beams of light to eliminate dark spot.

Extremely bright.



Model No.	Color Temperature	LED
AV016002	Cool White (5500-6300K)	9x5W

LED Deck Light 10-30VDC

IP Rating: IP68


LED Wattage: 18 W

Effective Wattage: 14W

Working Voltage: 10-30 VDC

Mount Type: Bracket mount

High quality LEDs for maximum light output and energy efficiency.



Model No.	Color Temperature	Material
AV013001	White (5500-6300K)	Aluminum

LED Deck Flood Light 10-30VDC

IP Rating: IP68

LED Wattage: 40W

Effective Wattage: 20W

Working Voltage: 10-30 VDC

Size: 100mm×100mm

Aluminum boat work flood light with SS316 bracket.

Model No.	Color Temperature	Material
AV013002	White (5500-6300K)	Aluminum




LED Open-topped Light 10-30VDC

IP Rating: IP67

LED Wattage: 6 W

Effective Wattage: 3.3W

Working Voltage: 10-30 VDC



Model No.	Color Temperature	Material
AV021001	White(6000K)	Aluminum

Solar Power Ventilator

Low Carbon, Environmentally Friendly

Solar Power Storage, 24 hours Availability



Solar power ventilator

For marine, boats, yachts, trailer, caravan Solar vent.

Waterproof design.

High quality battery can run the vent up to 30 hours with no sunlight.

Two types of blade(Intake & Exhaust) are provided with each vent.

Ventilator with rechargeable battery and switch.

Model No.	Material:	Battery	Switch
AV524135	Plastic	NO	NO
AV524135-B	Plastic	YES	YES
AV524136	Stainless Steel	NO	NO
AV524138-B	Stainless Steel	YES	YES
AV524139	Plastic	YES	YES
AV524140	Plastic	NO	YES



AV524135



AV524138



AV524140



AV524139



www.aliuminesvaltys.lt

Valtys: +370 620 66666

Gamyba: +370 615 15337

kimple.baltic@gmail.com

Sniegenų g. 26, LT-46383 Kaunas

I-V 9:00-18:00 · VI 10:00-14:00